Model: EV326

USE AND CARE GUIDE

WALL MOUNT VANITY



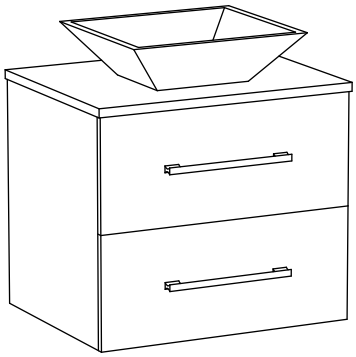

Questions, problems, missing parts? Before returning to the store,
call Sheffield Home Customer Service
9 a.m. - 5 p.m., EST, Monday - Friday

1-800-936-3213

AMGROUPINC.COM

Enchanté Accessories
New York, NY 10016

THANK YOU

We appreciate the trust and confidence you have placed in Sheffield Home through the purchase of this bathroom vanity. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Sheffield Home!

Table of Contents

Table of Contents 2
Safety Information 2
Warranty 3
What is Covered 3
What is Not Covered 3
Pre-installation 4
Planning Installation 4
Tools Required 4
Hardware Included 4
Package Contents 5
Installation 6
Care and Cleaning 9

Safety Information

Carefully read and understand the information given in this manual before beginning the assembly and installation.

WARNING: These instructions are for mounting the vanity into wood studs. If no stud is found in desired mounting location, contact a contractor.

CAUTION: Turn off the water supply. Open the faucet handles to relieve water pressure and ensure complete water shut-off.

CAUTION: Professional installation is recommended.

CAUTION: Do not let items come in contact with high heat sources.

CAUTION: Do not expose any part of the cabinet to direct prolonged sunlight. It will cause discoloration.

CAUTION: Do not let the surface of the cabinet come in contact with corrosive liquids, such as: alcohol, banana oil, gasoline, nail polish, acid, alkali and other chemical hazards.

NOTICE: Screws for wood studs are included. If you have metal studs, contact a contractor.

NOTICE: Mount the vanity with a wall stud in the center for optimal installation.

NOTICE: Do not let any sharp objects scratch the cabinet's surfaces.

NOTICE: The cabinet (C) is one piece. Do not disassemble.

NOTICE: Water supply hook-ups are not provided.

NOTICE: Consult a plumber for proper water supply connections.

Warranty

LIMITED WARRANTY

WHAT IS COVERED

The manufacturer warrants this fixture to be free from defects in materials and workmanship for a period of one (1) year from date of purchase. This warranty applies only to the original consumer purchaser and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alterations, neglect or mishandling. This warranty is limited to any labor/expense costs involved in the replacement or repair of said product.

WHAT IS NOT COVERED

This warranty shall not apply to any product that is found to have been improperly installed, setup, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, or faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the product, such as surface and/or weathering, as this is considered normal wear and tear. The manufacturer does not warrant and specially disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor/expense costs involved in the replacement or repair of said product.

Contact the Customer Service Team at 1-800-936-3213 or visit WWW.AMGROUPINC.COM.

Pre-installation

PLANNING INSTALLATION

Read all instructions before assembly and installation. Before starting installation of this vanity fixture or removal of a previous fixture, turn off the water supply. Open the faucet handles to relieve water pressure and ensure complete water shut-off. To avoid any damage, assemble this product on a soft, non-abrasive surface such as a carpet or cardboard. Inspect each part for defects that may have occurred during shipping. Report any damaged or missing items to the Customer Service Team immediately.

NOTE: Keep your receipt and these instructions for proof of purchase.

ESTIMATED INSTALLATION TIME

Twenty-four hours is needed to complete the installation process.

NUMBER OF PEOPLE REQUIRED

Two people are recommended to complete the installation process.

TOOLS REQUIRED (NOT INCLUDED)

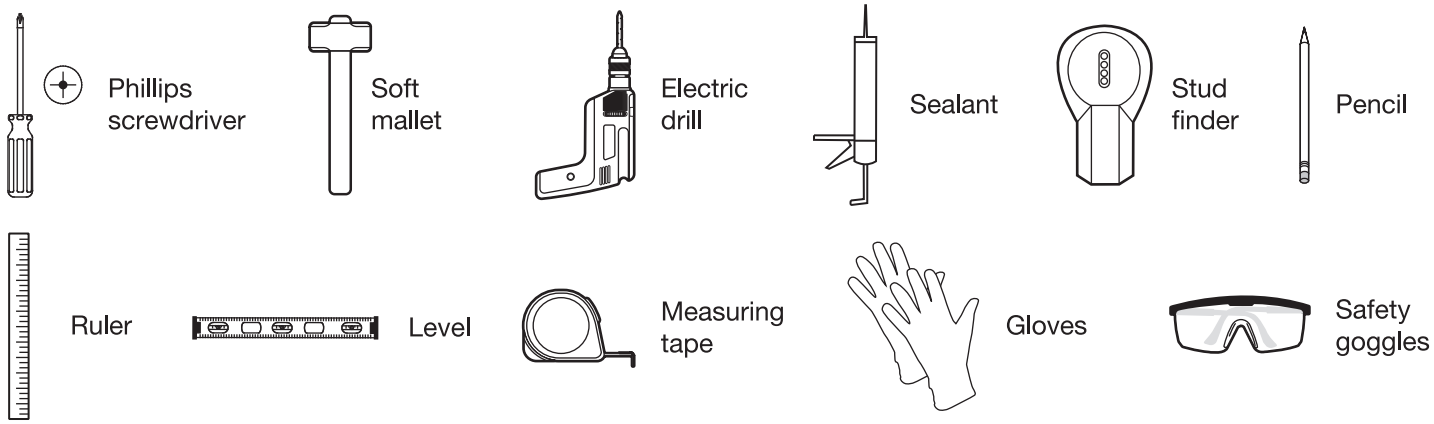

HARDWARE INCLUDED

NOTE: Hardware not shown to scale.

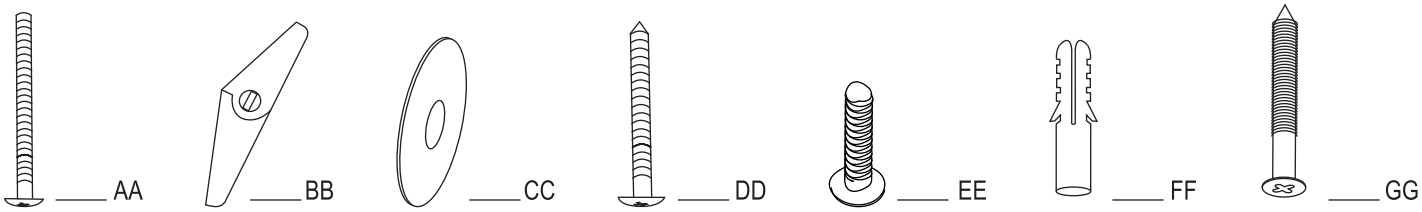

Part	Description	Quantity
AA	Long toggle bolt screw	4 + 4 extra
BB	Toggle bolt	4 + 2 extra
CC	Metal washer	4 + 2 extra
DD	Wood stud screw	2 + 2 extra

Part	Description	Quantity
EE	Handle screw	4
FF	Anchor for mirror	2
GG	Screw for mirror	2

PACKAGE CONTENTS

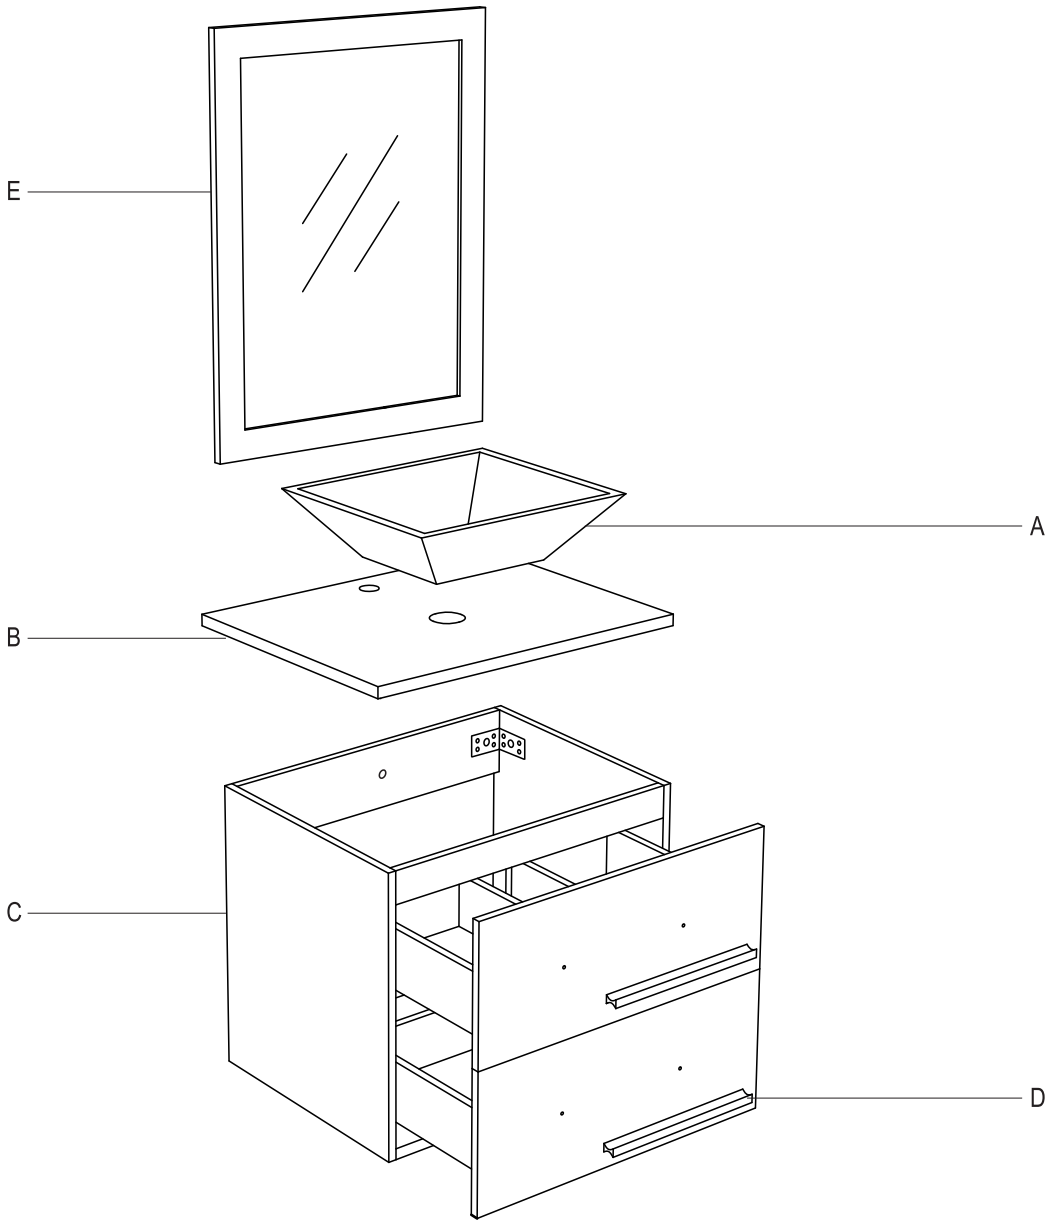

Part	Description	Quantity
A	Basin	1
B	Countertop	1
C	Cabinet	1
D	Handles	2
E	Mirror	1

Installation

1 Finding the stud (recommended)

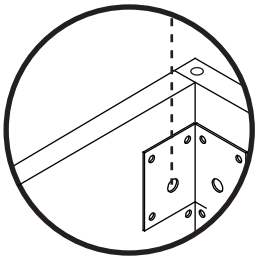

WARNING: These instructions are for mounting the vanity into wood studs. If no stud is found in desired mounting location, contact a contractor.

NOTICE: Screws for wood studs are included. If you have metal studs, contact a contractor.

NOTICE: Mount the vanity with a wall stud in the center for optimal installation.

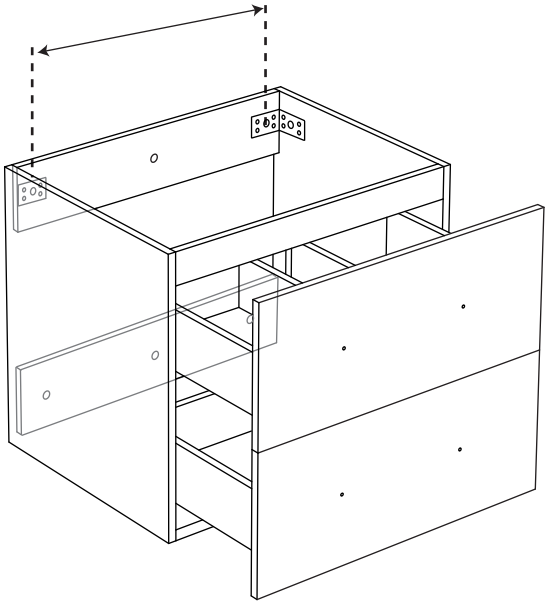

- ☐ When deciding the mounting location, note the location of the water supply lines. Use a stud finder to locate the wall stud in the desired mounting location. Mark the location with a pencil.
- ☐ Using the stud location as the central point, mark the position of the screws by measuring the space between the centers of the pre-installed L brackets. Use a level to ensure the screw holes are horizontally aligned.
- ☐ Vertical position is decided by the purchaser, with a recommended height range of 33 in. to 36 in. from floor to top of basin.

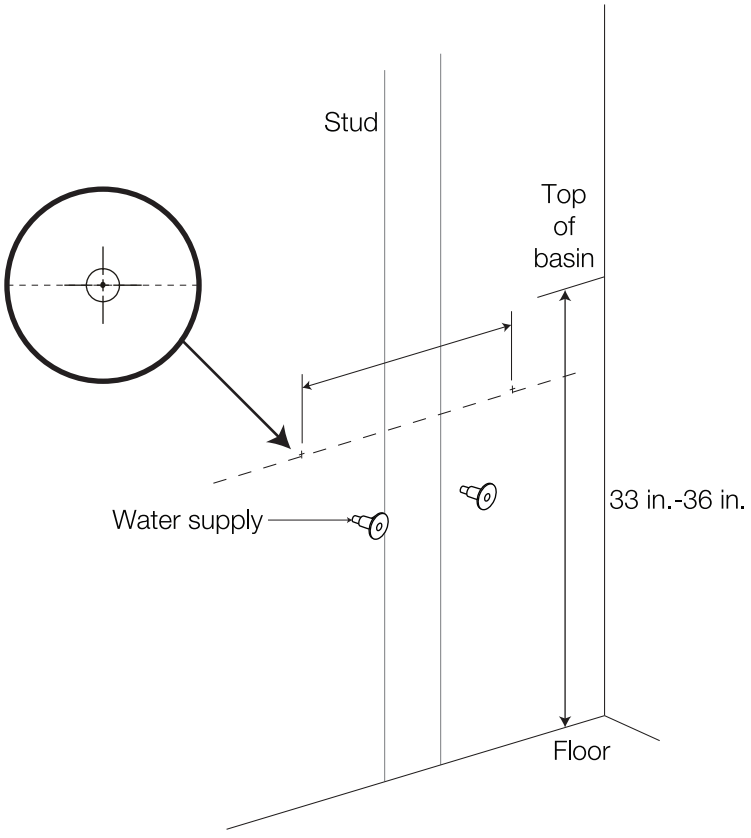

2 Installing the cabinet into wall stud (recommended)

CAUTION: Turn off the water supply. Open the faucet handles to relieve water pressure and ensure complete water shut-off.

NOTICE: The cabinet (C) is one piece. Do not disassemble.

NOTICE: Mount the vanity with a wall stud in the center for optimal installation.

NOTICE: Screws for wood studs are included. If you have metal studs, contact a contractor.

- ☐ Use a 5/8 in. drill bit to drill holes in the center of the two marked locations.
- ☐ Insert the long toggle bolt screws (AA) through the top pre-installed L brackets. From behind the vanity, screw the toggle bolts (BB) onto the long toggle bolt screws (AA).
- ☐ Pinch close the toggle bolts (BB) and insert compressed toggle bolts all the way through the hole in the wall until the toggle bolt spring releases. Hand tighten.

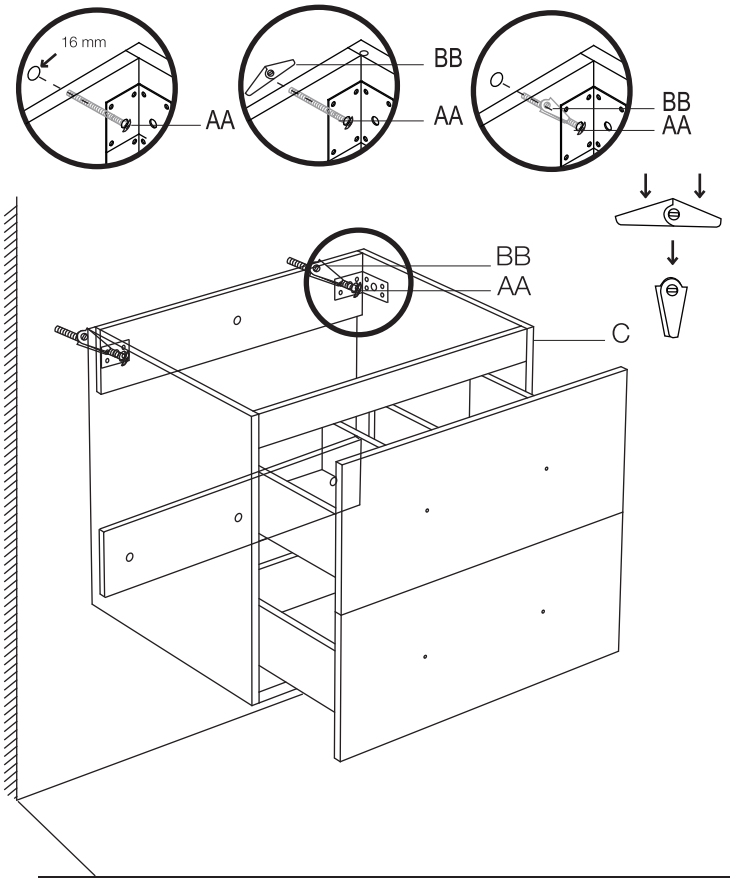

3 Installing the cabinet into wall stud

- ☐ Use a 5/8 in. drill bit to drill holes into the wall according to the outside pre-drilled holes of the bottom back board.
- ☐ Thread the metal washers (CC) and toggle bolts (BB) onto long toggle bolt screws (AA) and insert through outside pre-drilled holes on the bottom of cabinet and wall. Hand tighten.
- ☐ Use a 1/8 in. drill bit to drill holes into the wall according to the central pre-drilled holes on the top and back cabinet boards.
- ☐ Thread the metal washers (CC) onto wood stud screws (DD) and insert into drilled holes. Use the electric drill to insert wood stud screws through the central holes of the cabinet, wall and stud. Tighten all screws with electric drill.

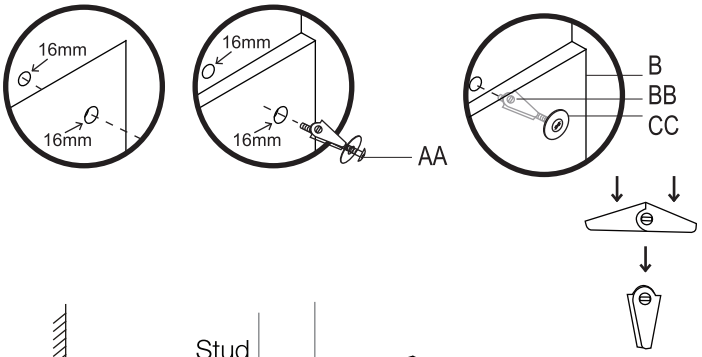

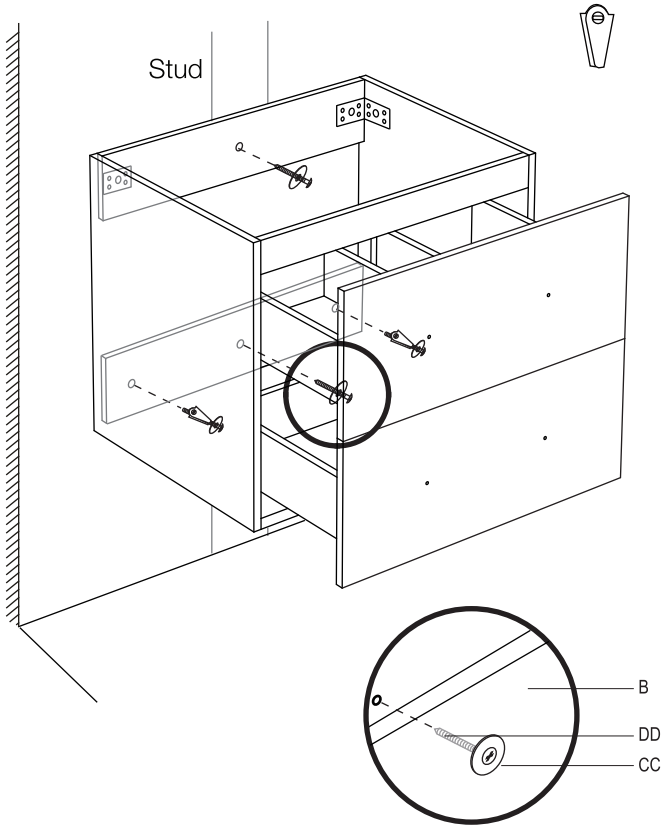

4 Installing the basin & countertop

- □ According to the sealant manufacturer's recommendations, apply sealant to the top back of the cabinet and wall. Do not over apply.
- □ Gently place the countertop (B) onto the cabinet (C). Allow to dry for twenty-four hours for proper curing.
- □ Apply sealant to the bottom of the basin and the top of the countertop. Do not over apply.
- □ Gently place the basin (A) onto the countertop (B). Allow to dry for twenty-four hours for proper curing.

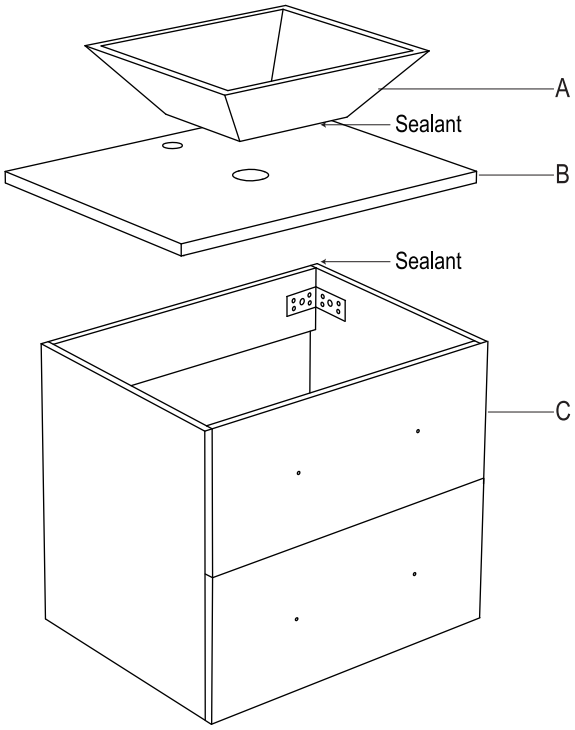

5 Installing the handles

- □ For shipping purposes, the handles (D) are pre-installed on the inside of the drawers. Un-install the handles (D).
- □ Re-attach the handles (D) onto the front of the cabinet drawers using screws (EE).

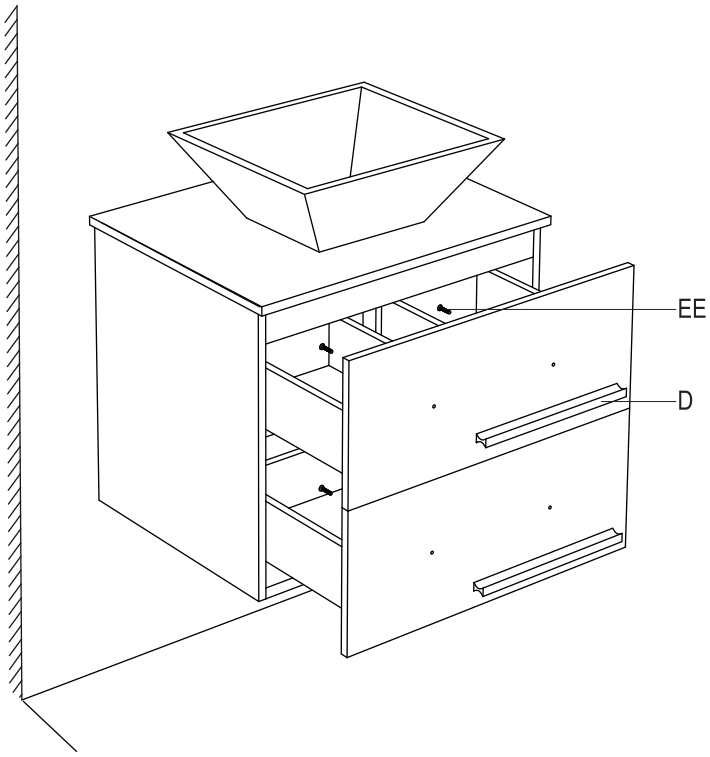

Installation (continued)

6 Installing the mirror

NOTICE: Screws for wood studs are included. If you have metal studs, contact a contractor.

- ☐ Measure the distance between the mirror's (E) hangers.
- ☐ Drill two level holes into the wall using the measurement.
- ☐ Using a soft mallet, lightly tap anchors (FF) into the drilled holes and then insert screws (GG) into the anchors, leaving 6-8 mm of the screw exposed.
- ☐ Install the mirror (E) as shown.

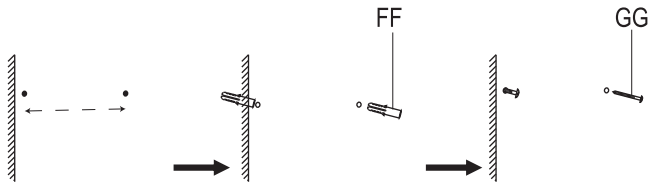

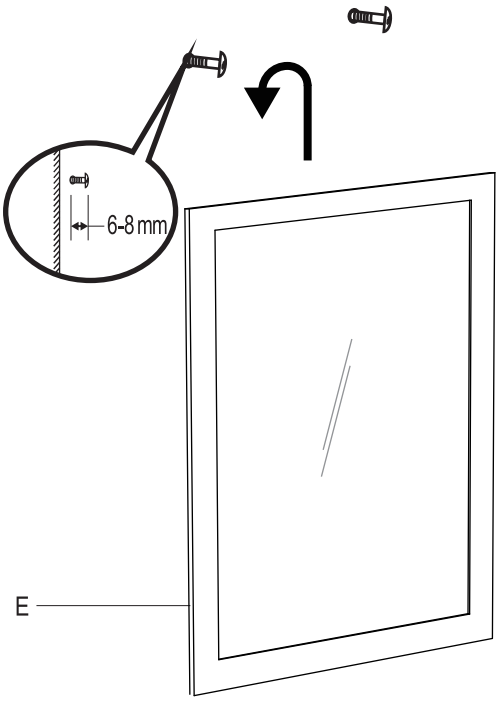

Maintenance

- ☐ Check the support connections and brackets at least twice a year to make sure they are secure. Due to constant use, some connections may become loose over time.

Care and Cleaning

- ☐ To clean the fixture, wipe with a soft, dry cloth.
- ☐ Do not expose the vanity to direct prolonged sunlight. It will cause discoloration.
- ☐ Do not let any sharp objects scratch the vanity.
- ☐ Do not let the fixture come in contact with high heat sources.
- ☐ Do not use any cleaners with chemicals, solvents, or harsh abrasives.

Questions, problems, missing parts? Before returning to the store,
call Sheffield Home Customer Service
9 a.m. - 5 p.m., EST, Monday - Friday

1-800-936-3213

AMGROUPINC.COM

Retain this manual for future use.